

28x60cm







1370lm output

320lm output

>350°

flexo

dimmer

58009N

IP20|1x 18.5W LED Input 230V|incl. 
1x 4.5W LED Input 230V|incl. 

Importer:
GLOBO Handels GmbH
Gewerbestr. 3
A-9184 Sankt Peter
AUSTRIA
www.globo-lighting.com
office@globo-lighting.com
MADE IN P.R.C



9 007371 449613








incl. 1x	Output 270V	incl. 1x	Output 270V
450 lm source	-20°C – +40°C	2200 lm source	-20°C – +40°C
1x 4.5W LED incl.	dimmable 	1x 18.5W LED incl.	dimmable 
3000Kelvin	Hg < 0 mg	3000Kelvin	Hg < 0 mg
20.000h Lifetime	Beam angle 120° 	20.000h Lifetime	Beam angle 120° 
10.000x ON/OFF	CRI>80 	10.000x ON/OFF	CRI>80 
Input 230V~ 50Hz		Input 230V~ 50Hz	

incl. 1x	Output 270V	incl. 1x	Output 270V
450 lm source	-20°C – +40°C	2200 lm source	-20°C – +40°C
1x 4.5W LED incl.	dimmable 	1x 18.5W LED incl.	dimmable 
3000Kelvin	Hg < 0 mg	3000Kelvin	Hg < 0 mg
20.000h Lifetime	Beam angle 120° 	20.000h Lifetime	Beam angle 120° 
10.000x ON/OFF	CRI>80 	10.000x ON/OFF	CRI>80 
Input 230V~ 50Hz		Input 230V~ 50Hz	

11x60cm







1370lm output



320lm output

>350°


flexo

dimmer



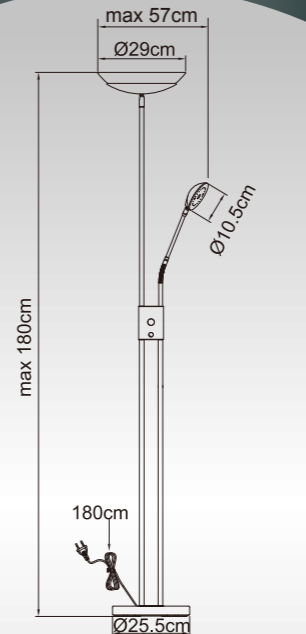
58009N









IP20|1x 18.5W LED Input 230V|incl. 
1x 4.5W LED Input 230V|incl. 









Importer:
GLOBO Handels GmbH
Gewerbestr. 3
A-9184 Sankt Peter
AUSTRIA
www.globo-lighting.com
office@globo-lighting.com
MADE IN P.R.C



9 007371 449613

incl. 1x	Output 270V	incl. 1x	Output 270V
450 lm source	-20°C – +40°C	2200 lm source	-20°C – +40°C
1x 4.5W LED incl.	dimmable 	1x 18.5W LED incl.	dimmable 
3000Kelvin	Hg < 0 mg	3000Kelvin	Hg < 0 mg
20.000h Lifetime	Beam angle 120° 	20.000h Lifetime	Beam angle 120° 
10.000x ON/OFF	CRI>80 	10.000x ON/OFF	CRI>80 
Input 230V~ 50Hz		Input 230V~ 50Hz	

incl. 1x	Output 270V	incl. 1x	Output 270V
450 lm source	-20°C – +40°C	2200 lm source	-20°C – +40°C
1x 4.5W LED incl.	dimmable 	1x 18.5W LED incl.	dimmable 
3000Kelvin	Hg < 0 mg	3000Kelvin	Hg < 0 mg
20.000h Lifetime	Beam angle 120° 	20.000h Lifetime	Beam angle 120° 
10.000x ON/OFF	CRI>80 	10.000x ON/OFF	CRI>80 
Input 230V~ 50Hz		Input 230V~ 50Hz	

5x20cm





58009N