

35x60cm

LED

Step-1



Step-2



Step-3



300-3000lm
output

42-420lm
output

colour
fixing

memory
function

touch
on/off

touch
many
steps

continuous
touch
dimmer

3
light
steps



58909M

IP20|40W LED 230V|incl. 
5.5W LED 230V|incl. 

Importer:

GLOBO Handels GmbH
Gewerbestr. 3
A-9184 Sankt Peter
AUSTRIA


www.globo-lighting.com

office@globo-lighting.com

MADE IN P.R.C



9 007371 572878

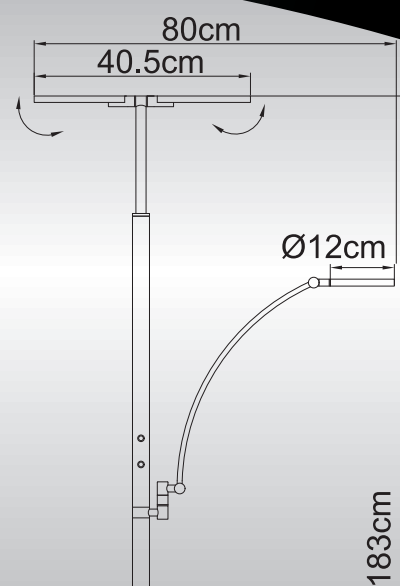

- (DEU) LED Stehleuchte
- (GBR) LED floor lamp
- (BGR) LED лампион
- (CZE) LED stojanové svítidlo
- (DNK) LED gulvlampe
- (ESP) Lámpara de pie LED
- (EST) LED Põrandalamp
- (FIN) LED-lattiavalaisin
- (FRA) Lampadaire LED
- (HRV) LED stajaca lampa
- (HUN) LED állólámpa
- (ISL) LED gólfampi
- (ITA) Piantana a LED
- (LTU) LED pastatomas šviestuvos
- (LVA) LED stāvlampa
- (NOR) Golvlampe med LED
- (RUS) Торшер напольный LED
- (SRB) LED podna lampa
- (SVK) LED stojanové svetidlo
- (SVN) LED stojęča svetilka
- (SWE) LED-golvlampe
- (TUR) Ayaklı LED aydınlatma
- (BIH) LED stajaca lampa
- (NL) LED vloerlamp
- (POR) Candeeiro de pé LED
- (PL) LED lampa stojąca
- (RO) Lampadar LED

400-4000 lm
source

40W LED incl.

2700 Kelvin 

4000 Kelvin 

6000 Kelvin 

20.000h Lifetime

10.000x ON/OFF

Input 230V~ 50/60Hz

Output 24V



-20°C — +35°C

dimmable 

Hg=0mg

Beam angle 120° 

CRI ≥ 80 



57-570 lm
source

5.5W LED incl.

2700 Kelvin 

4000 Kelvin 

6000 Kelvin 

20.000h Lifetime

10.000x ON/OFF

Input 230V~ 50/60Hz

Output 24V



-20°C — +35°C

dimmable 


Hg=0mg

Beam angle 120° 

CRI ≥ 80 



4x20cm

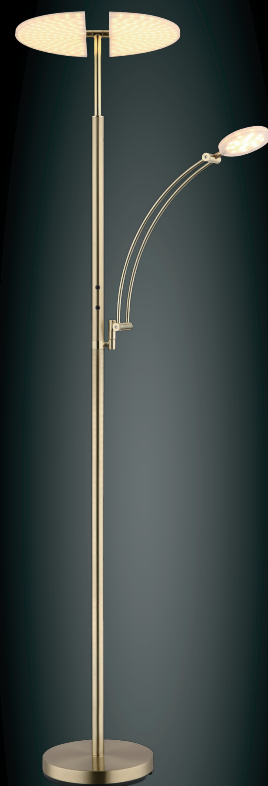

58909M